SIEMENS

Data sheet for three-phase Squirrel-Cage-Motors

MLFB-Ordering data: **1LE1003-0DA22-2KA4-Z**
H03

Motor type: **1AV3082A**
Client order no.: Item no.:
Order no.: Consignment no.:
Offer no.: Project:
Remarks:

U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	NOM. EFF at ... load [%] 4/4	3/4	2/4	Power factor at ... load 4/4	3/4	2/4	I_A/I_N I_I/I_N	M_A/M_N T_I/T_N	M_K/M_N T_B/T_N	IE-CL
230	Δ	50	0.75	- / -	2.75	2850	2.5	80.7	82.2	81.9	0.86	0.82	0.73	6.2	2.6	3.0	IE3
400	Y	50	0.75	- / -	1.56	2850	2.5	80.7	82.2	81.9	0.86	0.82	0.73	6.2	2.6	3.0	IE3
460	Y	60	0.86	- / -	1.63	3450	2.4	77.0	78.0	77.2	0.86	0.82	0.73	6.4	2.6	3.1	IE3
460	Y	60	0.75	- / -	1.45	3480	2.1	77.0	77.2	75.7	0.84	0.79	0.70	7.1	3.0	3.6	IE3
IM B14 / IM 3601		FS 80 M			11 kg	IP55	CC032A	IEC/EN 60034			IEC, DIN, ISO, VDE, EN						

Mechanical data

Sound pressure level 50Hz/60Hz (load)	60 dB(A)	64 dB(A)
Moment of inertia	0.0011 kg m²	
Bearing DE | NDE	6004 2Z C3	6004 2Z C3
Bearing lifetime	40000 h	
Lubricants	Esso Unirex N3	
Regreasing device	No	
Grease nipple	- / -	
Type of bearing	Preloaded bearing DE	
Condensate drainage holes	Yes	
External earthing terminal		
Vibration class	A	
Insulation	155(F) to 130(B)	
Duty type	S1	
Direction of rotation	bidirectional	
Frame material	aluminum	
Data of anti condensation heating	-/-	
Coating (paint finish)	Standard paint finish C2	
Color, paint shade	RAL7030	
Motor protection	(A) without (Standard)	
Method of cooling	IC411 - self ventilated, surface cooled	

Environmental conditions

Ambient temperature	-20 °C - +40 °C
Altitude above sea level	1000 m

Terminal box

Terminal box position	top
Material of terminal box	Aluminium
Type of terminal box	TB1 E00
Contact screw thread	M4
Max. cross-sectional area	1.5 mm²
Cable diameter from ... to ...	9.0 mm - 17.0 mm
Cable entry	1xM25x1,5
Cable gland	1 plug

Special design (1)

H03 Condensation drain holes in end shield

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for the payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Weitergabe sowie Vervielfältigung, Verbreitung und/oder Bearbeitung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten

Confidential/Vertraulich/Classified/Privado/Confidentiel/Riservato/Confidencial/Fortrolig
Confid® ltre de secret d'entreprise. Tous droits ®servés.
Comunicado como secreto empresarial. Reservados todos os direitos.
Fastställt som företagshemlighet. Med ensamrätt förbehålls.
Confiado como secreto de empresa. Nos reservamos todos los derechos.

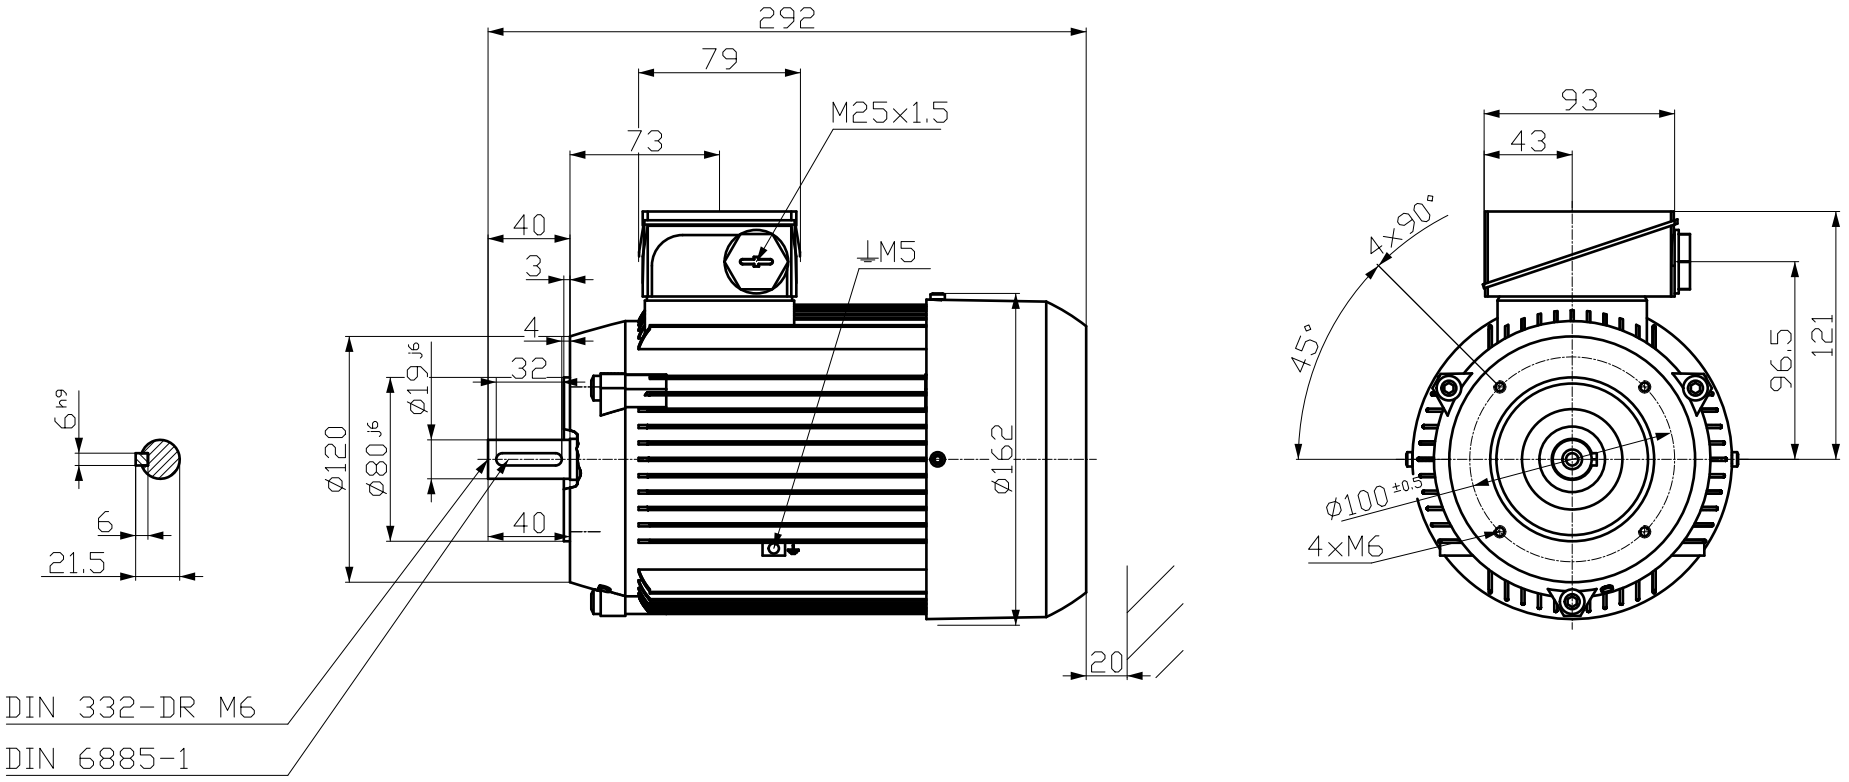

Tolerance	Surface	Material	Weight: -	Scale: mm
1LE1003-0DA22-2KA4-Z H03	Author Creator: DTK Approval Department	Dimensional drawing MaÇzeichnung		
	Change Order	MLFB		Doc Type
SIEMENS	Doc State: 2/1/18	Item No		Paper Size: A3
	Revision / Index / RS	Doc No		1st Language: en 2nd Language: de
© Siemens AG 2018	Project No: -	Ref No: -		Sheet: 1 of 1